




	C 220-CI 220	C 320-CI 320	C420-CI 420	C620-CI 620
Sealing length: mm	220	320	420	620
Sealing width: mm	2,5	2,5	2,5	2,5
Max. film width: mm	200	300	400	600
Cutting length: mm	200	300	400	600
Voltage: V/Hz	230 – 50/60	230 – 50/60	230 – 50/60	230 – 50/60
Power :W	75	75	200	200
Dimensions of the machine: HxSzxM mm	450 x 100 x 175	550 x 100 x 175	650 x 100 x 175	850 x 100 x 175
Dimensions of the packed machine: HxSzxM mm	475 x 133 x 200	575 x 133 x 200	675 x 133 x 200	875 x 133 x 200
Weight: kb	3,5 kg	3,5	4,5	6,5
Maximum foil thickness: Micron	PE – 200 PP - 200 BOPP - 100 PVC - 60	PE – 200 PP - 200 BOPP - 100 PVC - 60	PE – 200 PP - 200 BOPP - 100 PVC - 60	PE – 200 PP - 200 BOPP - 100 PVC - 60

Tillbehör

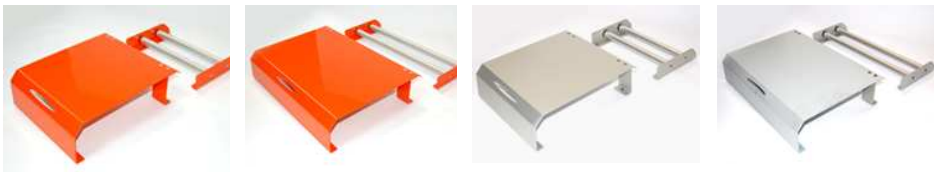

ASM Sweden AB
 Huvudkontor & lager: Box 9182, 200 39 MALMÖ. Bronsyxegatan 9 , 213 75 MALMÖ Tel. 040 - 22 89 80,
 Fax 040 - 22 89 60

www.asm.eu